



Overview

- Snap track mountable relay modules.

RB1224

- 12VDC or 24VDC operation.
- 5 amp/120VAC/28VDC DPDT contacts.

RBR1224


- 12VDC to 24VDC operation.
- 2 amp/120VAC/28VDC DPDT contacts.

Specifications


- Coil draw 50mA.
 - Snap track mountable (order part # ST1).
- Board Dimensions (approximate):
2.75"L x 2"W x 1"H

RB1224 Application Drawings


Dry Contacts



Polarity Reversal

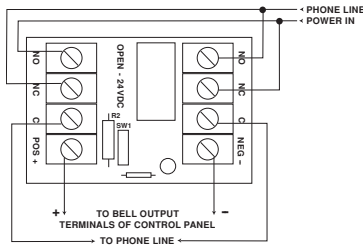

Line Seizure

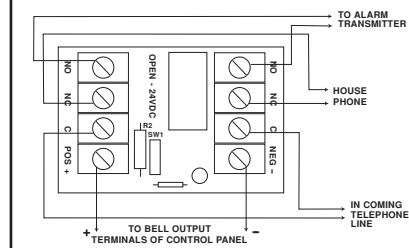

Latching Dry Contacts

