



RBOC7 - Open Collector Multiple Relay Module


Specifications:

- 12VDC or 24VDC selectable operation.
- Seven (7) independent (3VDC to 24VDC @ 2mA minimum) positive inputs.
- Seven (7) open collector outputs capable of sinking 100mA each.

Board dimensions: 6.5"L x 3.25"W x 1"H

Installation Instructions:

1. Mount unit in desired location/enclosure.
2. Connect positive trip outputs to desired trigger inputs. INP1 to INP7 activate outputs on positive trip signal of 3VDC to 24VDC @ 2mA.
3. Open collector outputs are marked "OC".
Open collector output specs:
Sink current: 100mA.
Maximum output voltage: 50VDC.

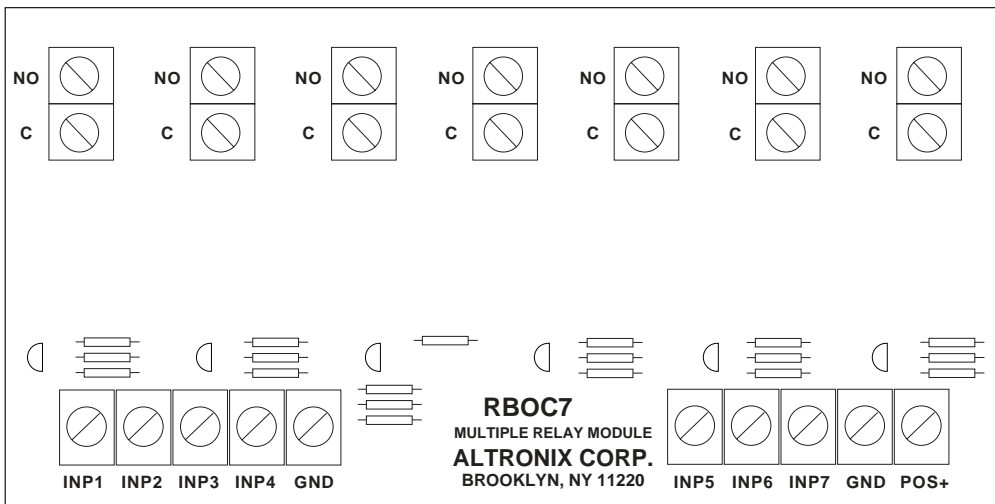

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

